

Fig. 1

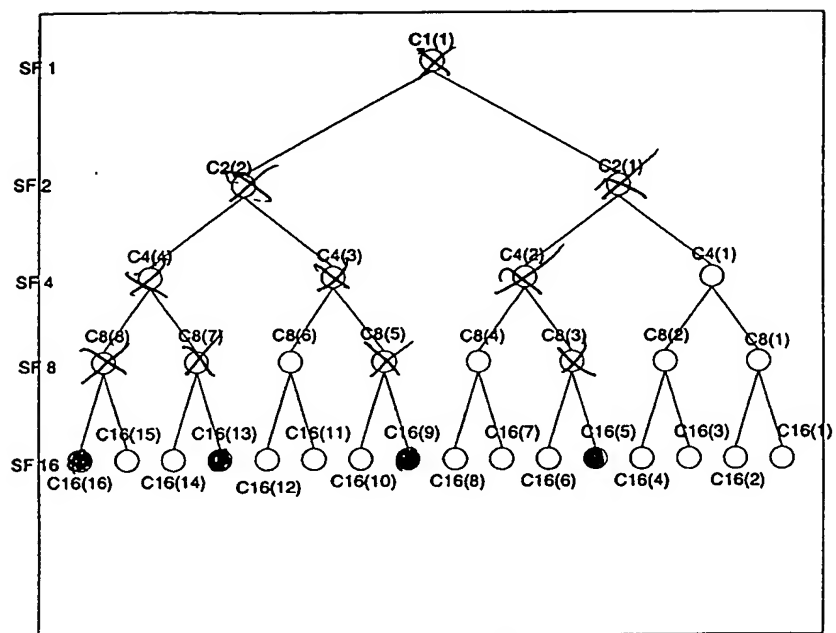


Fig. 2A

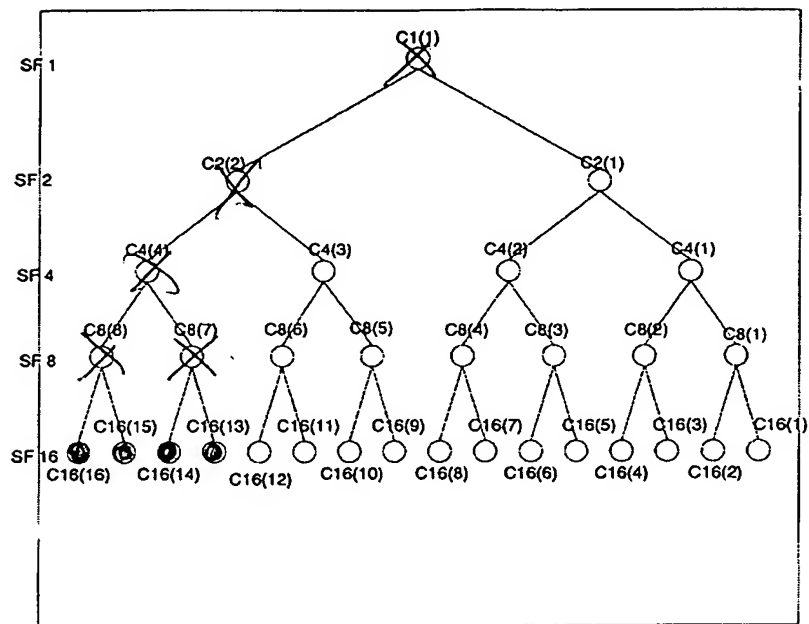


Fig. 2B

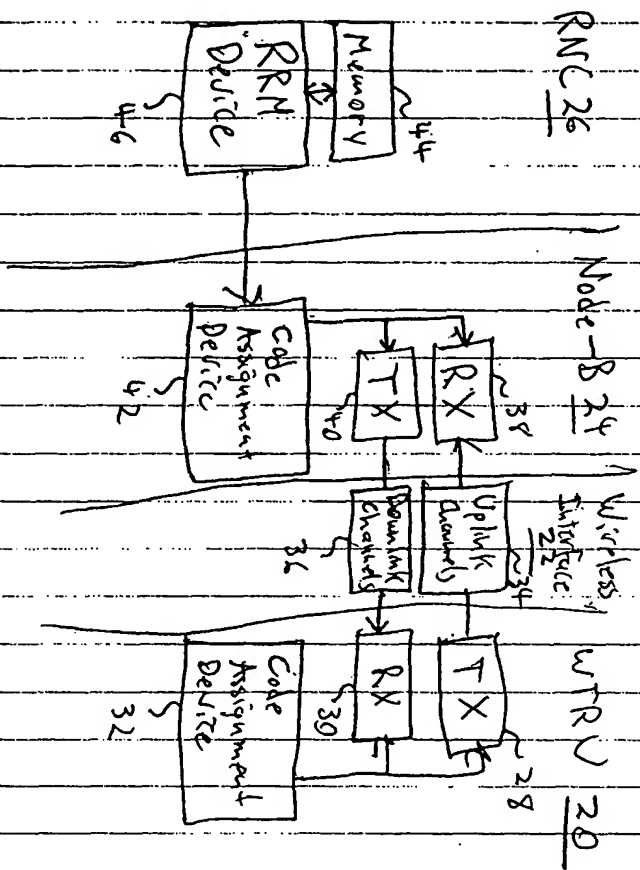


Fig. 3

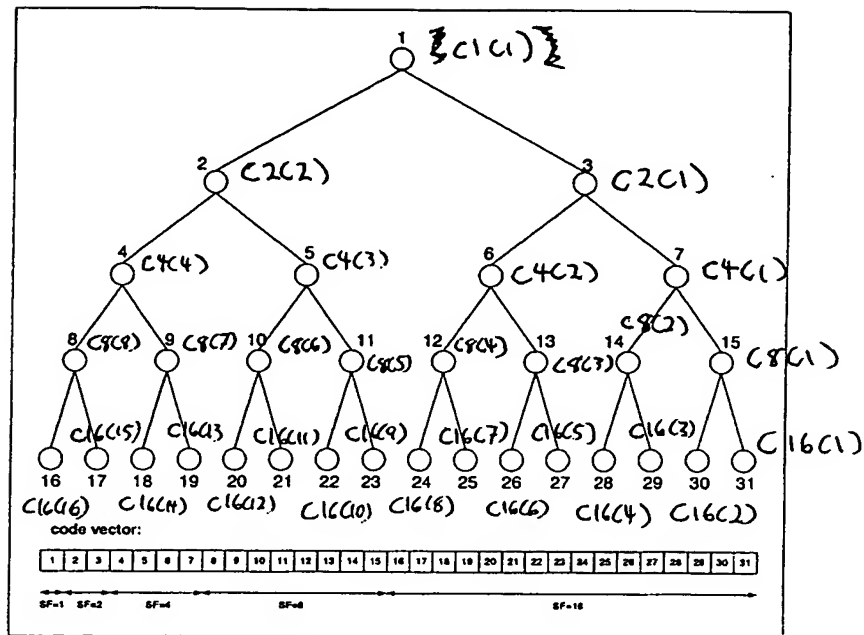


FIG. 4

Identifier	1	2	3	4	5	6	7	8	...	31
Code Use	48 ₁	48 ₂	48 ₃	48 ₄	48 ₅	48 ₆	48 ₇	48 ₈	...	48 ₃₁
Bit or Word										

Fig. 5



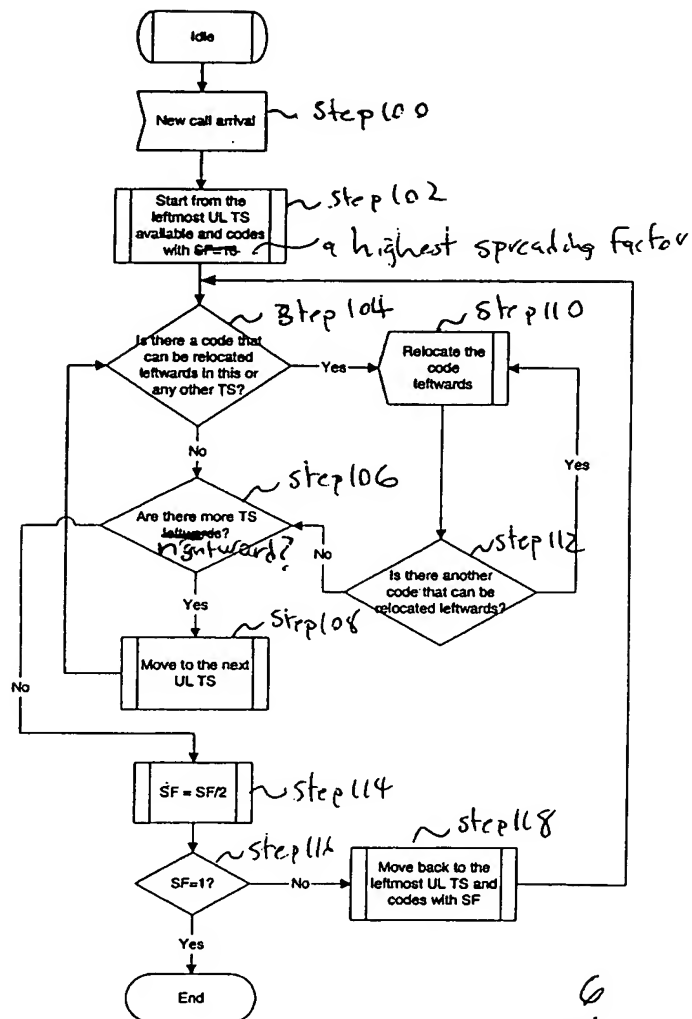


FIG. 6

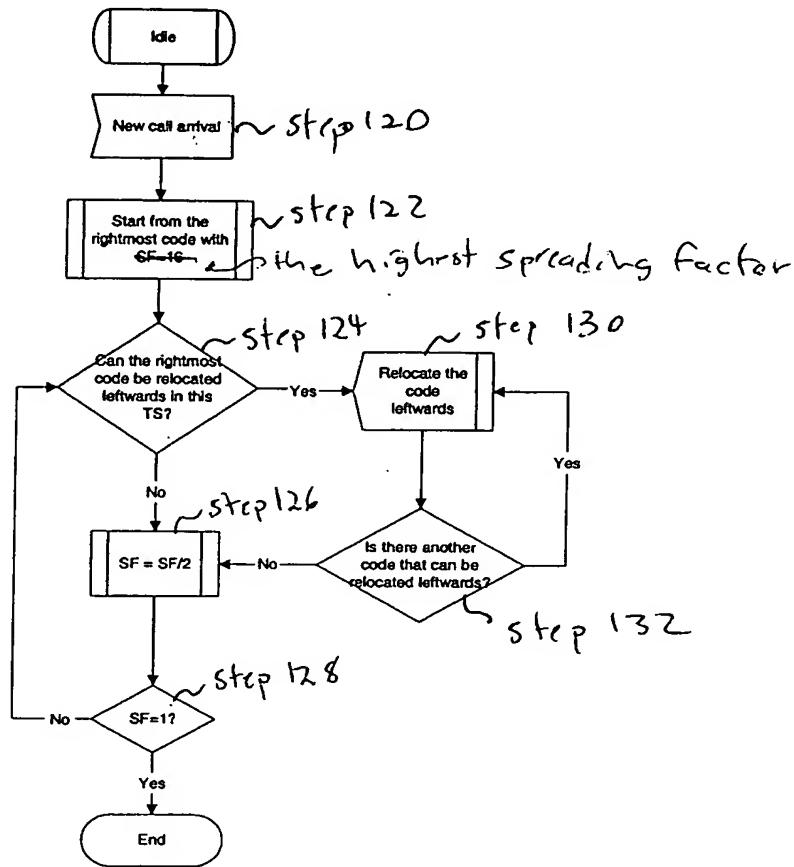


FIG. 5

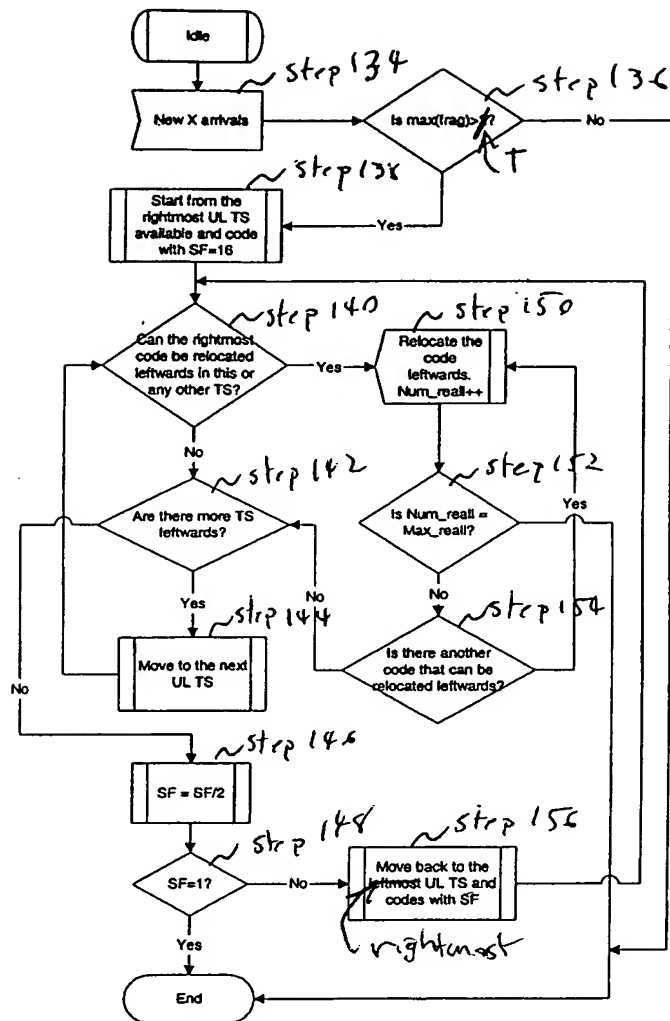


FIG. 8

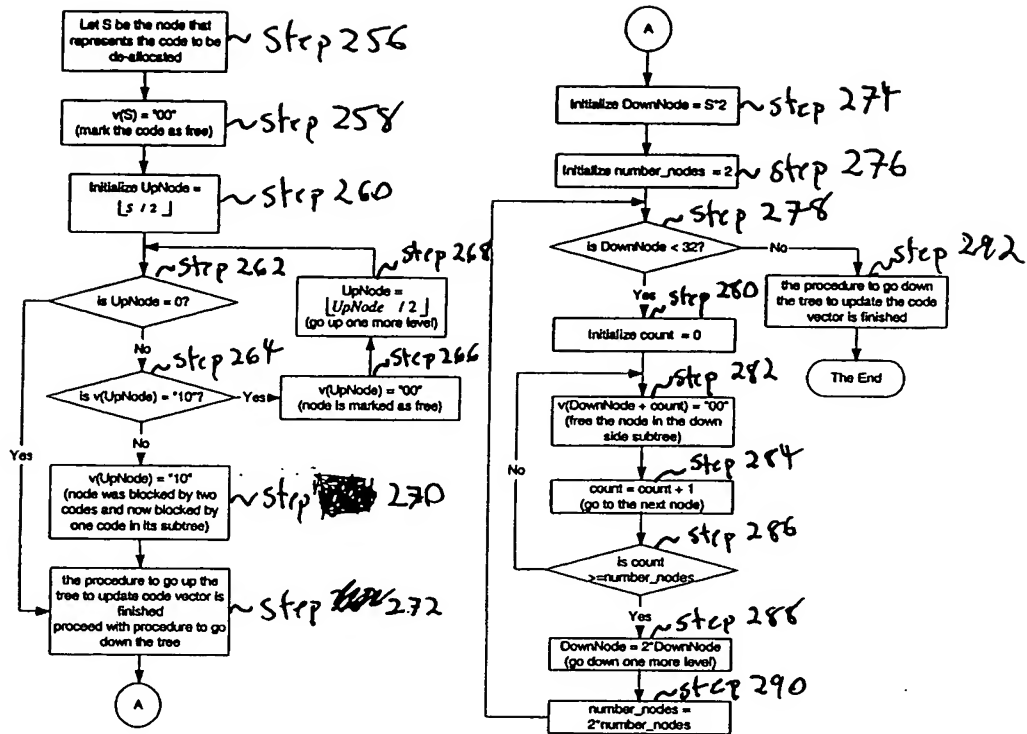


Fig. 10

300

Initialize:
 $X=Q$
 (Q is the SF of the code to allocate)
 Optimal_Primary = 0
 Non_Optimal_Primary = 0
 (Initialize optimal and non-optimal as not found)

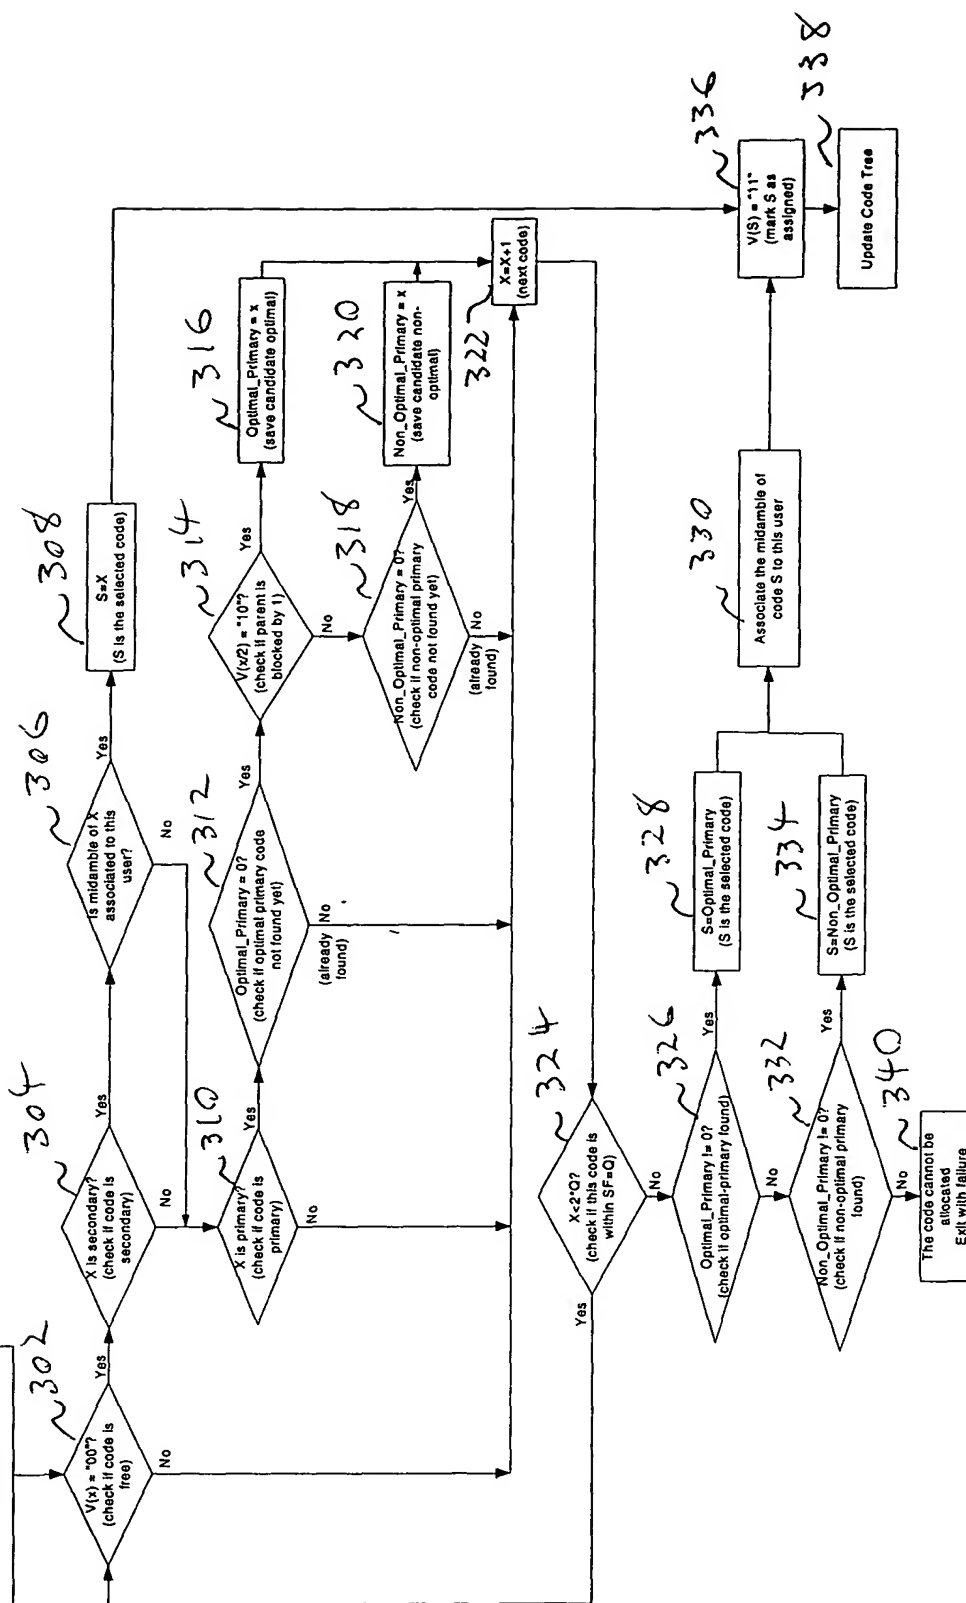


Fig. 11